
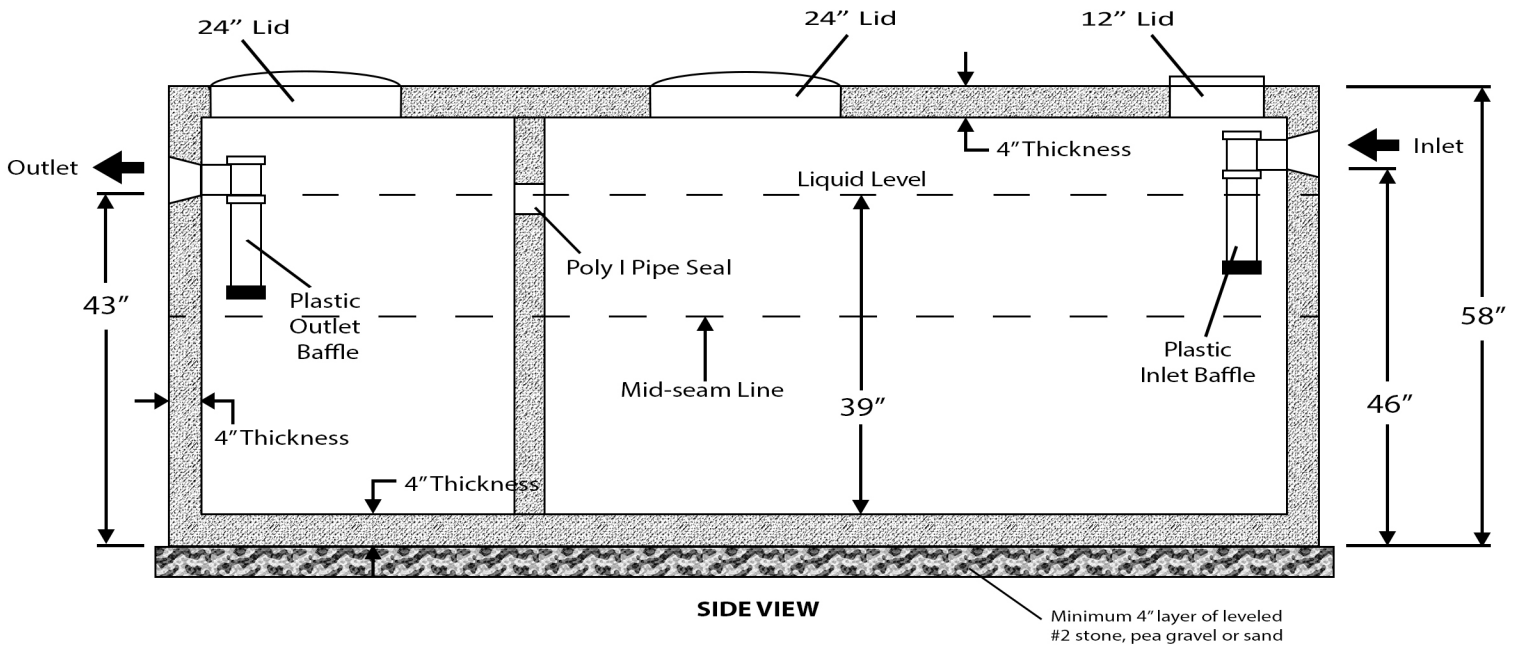


# 1500 GAL. MID-SEAM DUAL CHAMBER SEPTIC TANK

\*Available in single chamber upon request

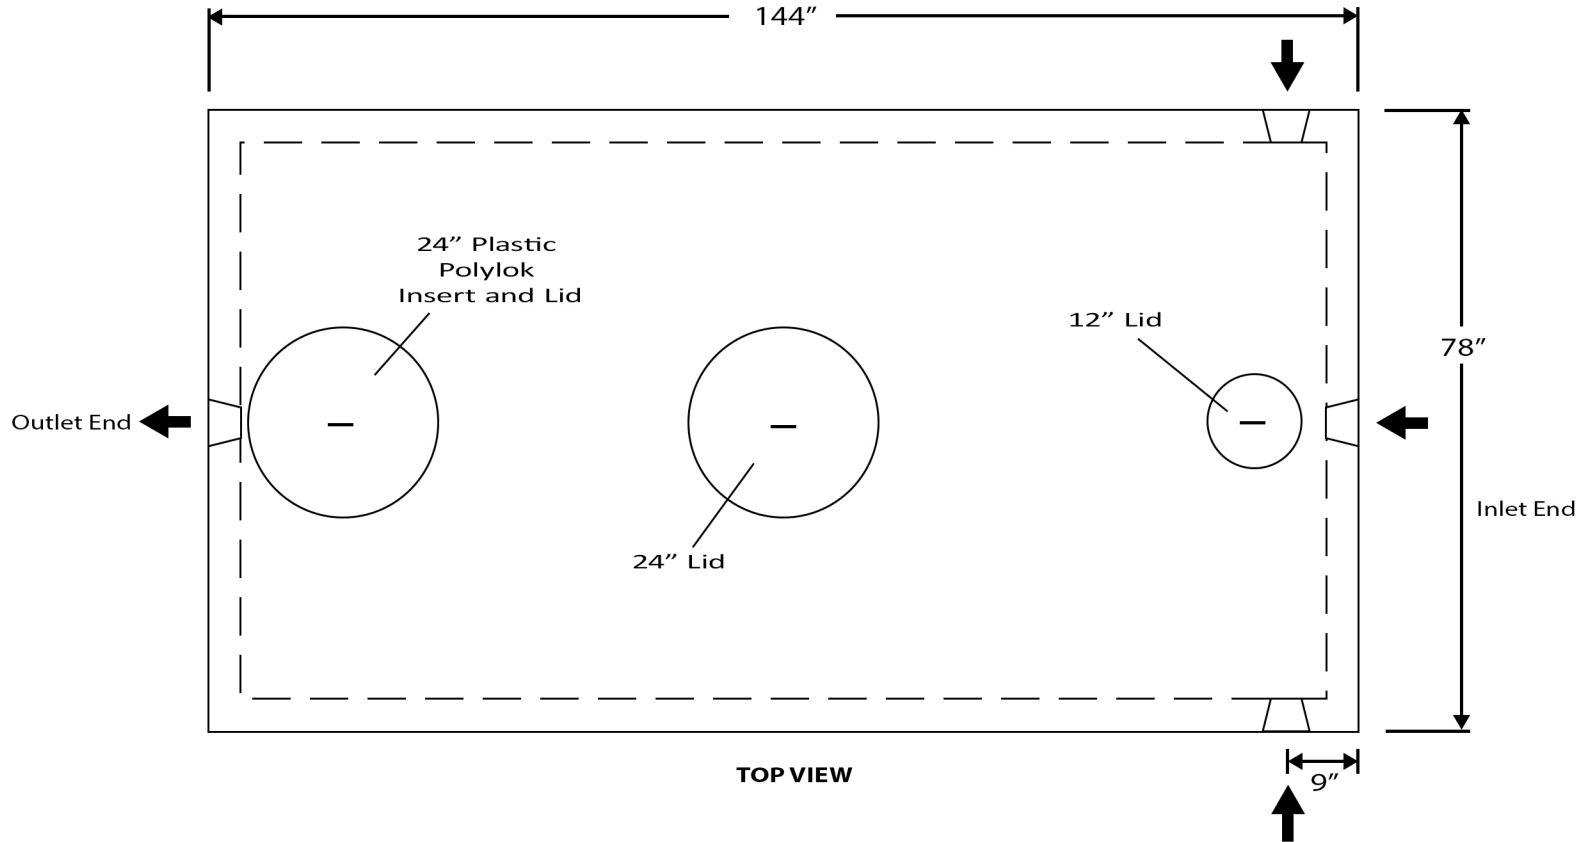

SPECIFICATIONS	
<ul style="list-style-type: none"> <li>- Concrete Min. Strength: 5,000 psi</li> <li>- Reinforcement:</li> <li>- Air Entrainment: 6%</li> <li>- Construction Joint: Polylok Butyl Rubber Sealant</li> <li>- Pipe Connection: Polylok Seal</li> <li>- Weight = 16,000 lbs.</li> </ul>	<p><b>Peenpack Inc.</b></p> <p>96 Lybolt Drive                      Huguenot, NY 12746                      (845)-856-6726 / Fax 856-6842                      peenpack@frontier.com                      www.peenpack.com</p> <p>2019</p>