
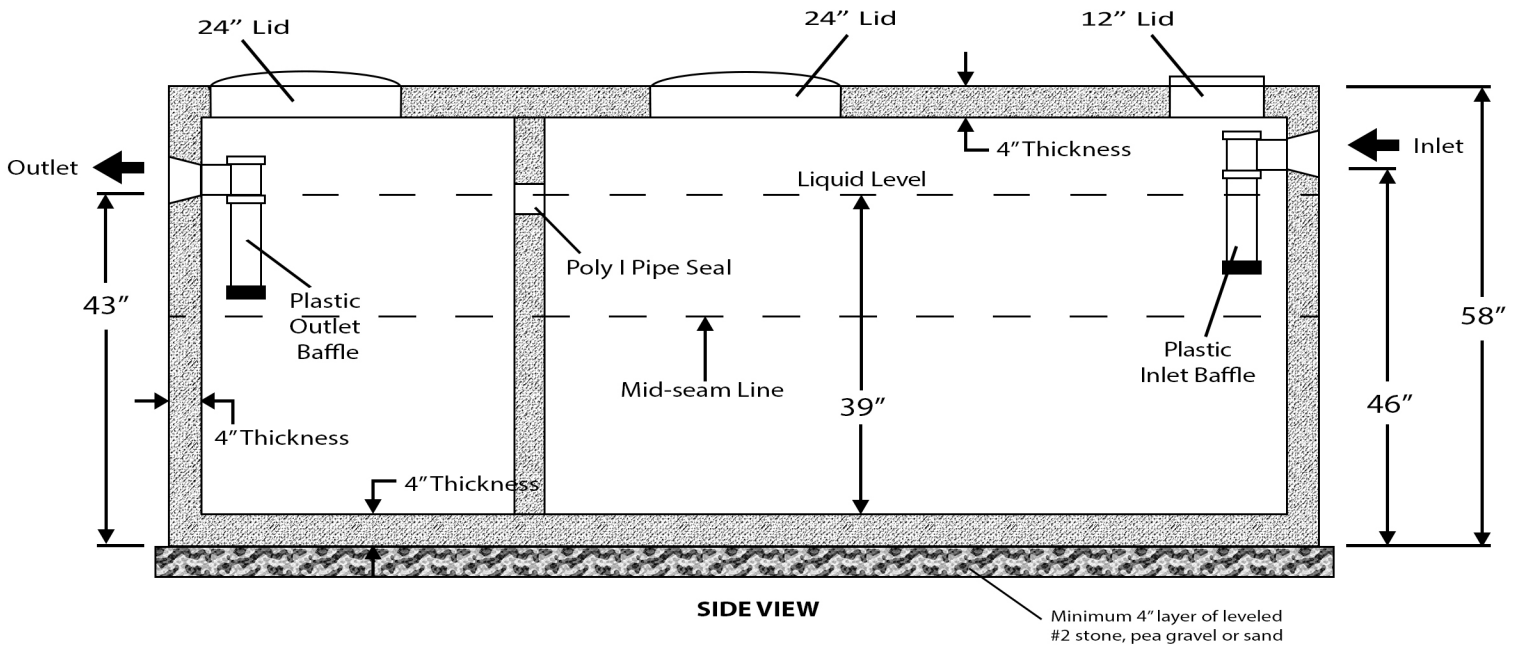


1500 GAL. MID-SEAM DUAL CHAMBER SEPTIC TANK

*Available in single chamber upon request

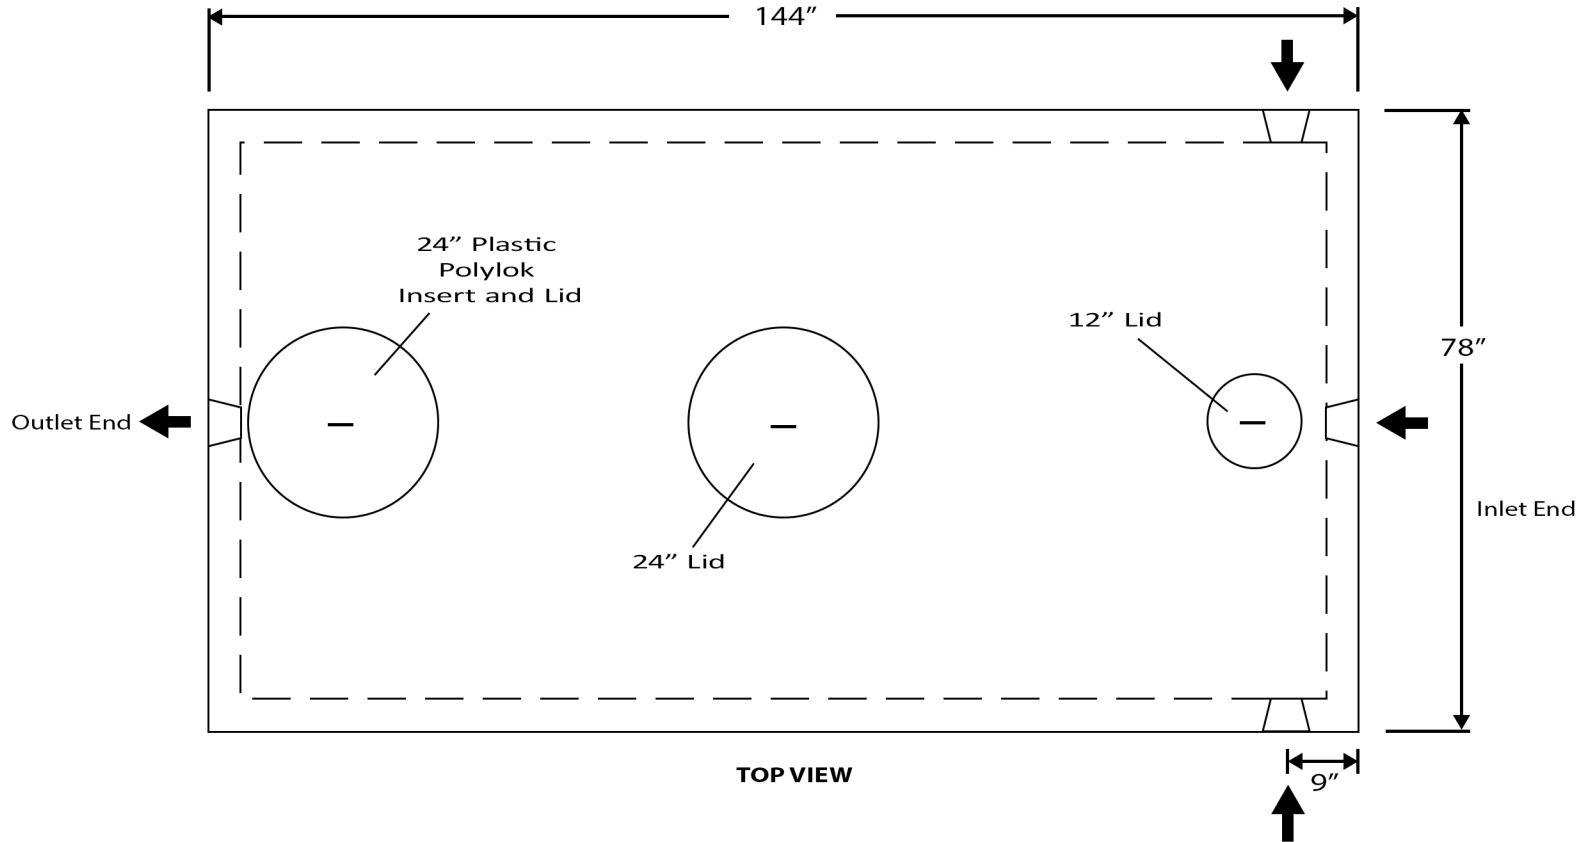

SPECIFICATIONS

- Concrete Min. Strength: 5,000 psi
- Reinforcement:
- Air Entrainment: 6%
- Construction Joint: Polylok Butyl Rubber Sealant
- Pipe Connection: Polylok Seal
- Weight = 16,000 lbs.

Peenpack Inc.

96 Lybolt Drive
 Huguenot, NY 12746
 (845)-856-6726 / Fax 856-6842
 peenpack@frontier.com
 www.peenpack.com

2019