
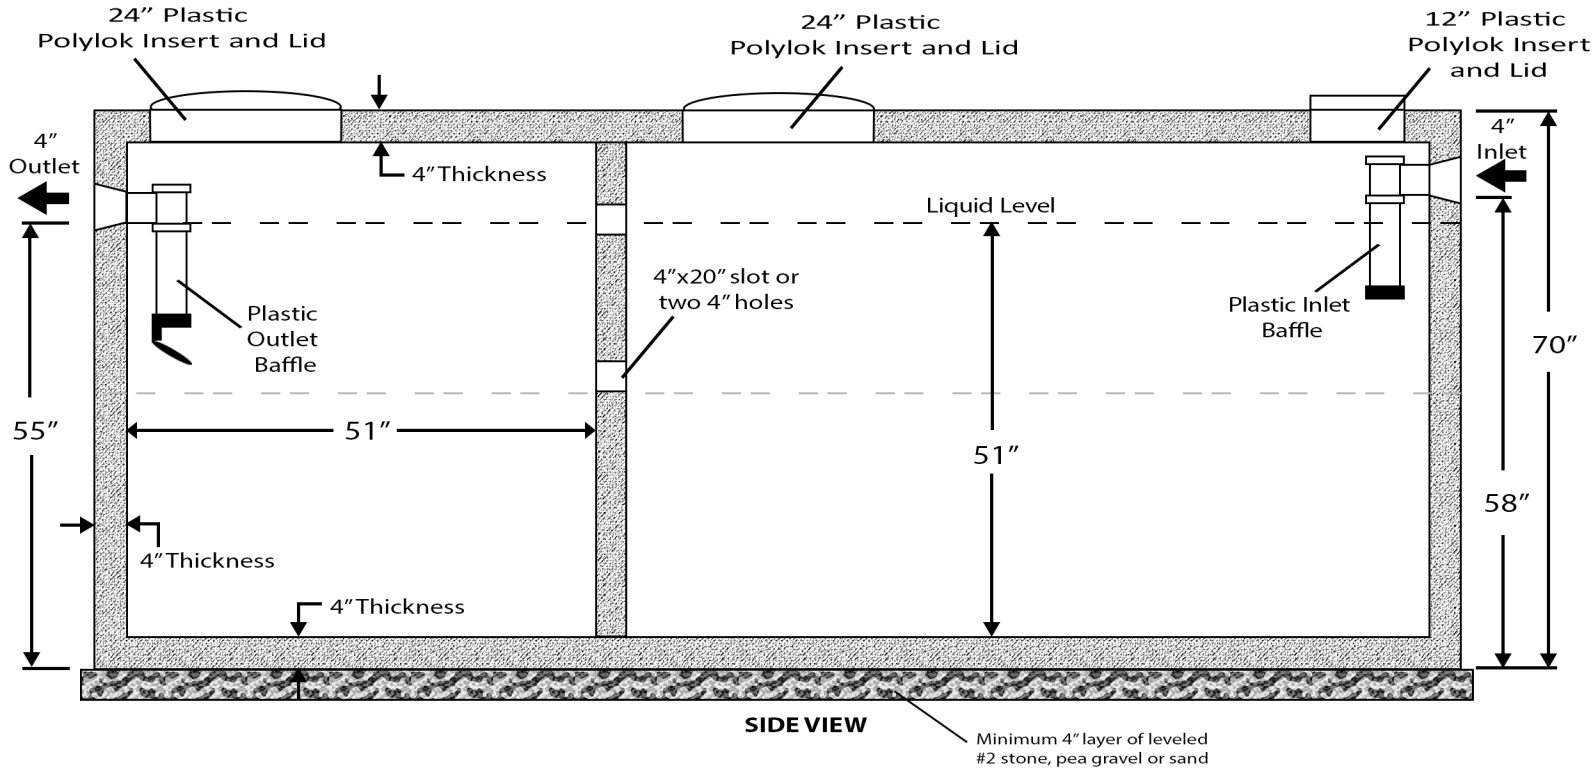


2500 GAL. DUAL CHAMBER SEPTIC TANK

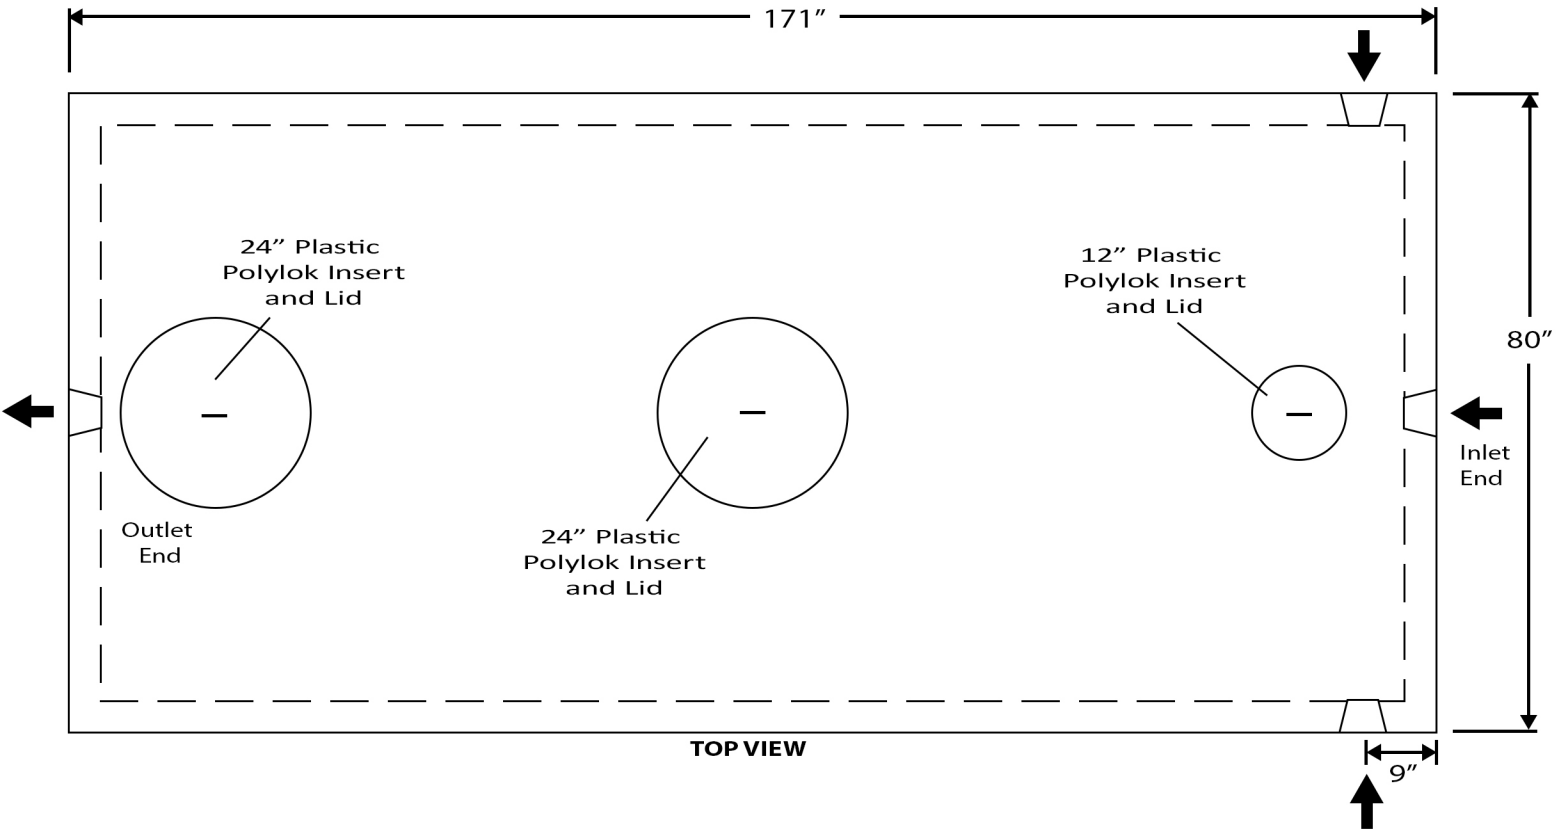

SPECIFICATIONS	
- Concrete Min. Strength: 5,000 psi	<p>Peenpack Inc. 96 Lybolt Drive Huguenot, NY 12746 (845)-856-6726 / Fax 856-6842 peenpack@frontier.com www.peenpack.com</p> <p>2019</p>
- Reinforcement: #3 Rebar, 10x10x10x10 Wire, Nycon XL100 Fiber	
- Air Entrainment: 6%	
- Construction Joint: Polylok Butyl Rubber Sealant	
- Pipe Connection: Polylok Seal	
- Weight = 23,240 lbs.	