



600 GAL. DRYWELL RING

*Lifting bar required

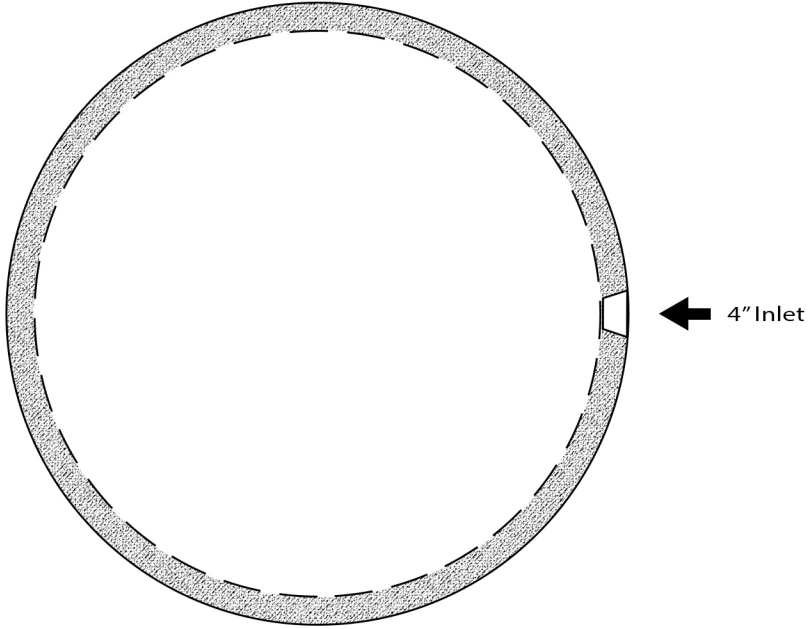

TOP VIEW

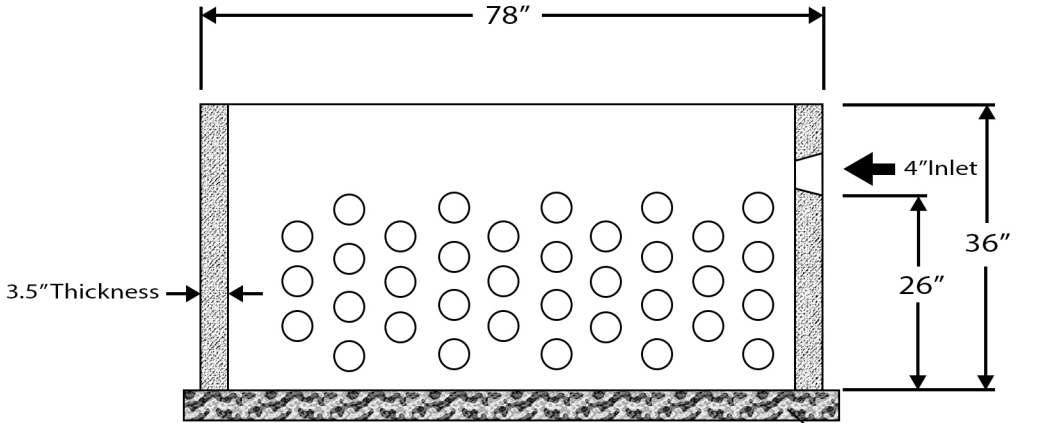

SIDE VIEW

Minimum 4" layer of leveled #2 stone, pea gravel or sand

SPECIFICATIONS	
<ul style="list-style-type: none"> - Concrete Min. Strength: 5,000 psi - Reinforcement: #3 Rebar, 6x6x10x10 Wire, Nycon XL100 Fiber - Air Entrainment: 6% - Construction Joint: Polylok Butyl Rubber Sealant - Weight = 2,280 lbs. 	<p style="font-size: 1.2em; font-weight: bold; margin: 0;">Peenpack Inc.</p> <p style="margin: 0;">96 Lybolt Drive Huguenot, NY 12746 (845)-856-6726 / Fax 856-6842 peenpack@frontier.com www.peenpack.com</p> <p style="margin: 0;">2019</p>