



750 GAL. SINGLE CHAMBER SEPTIC TANK

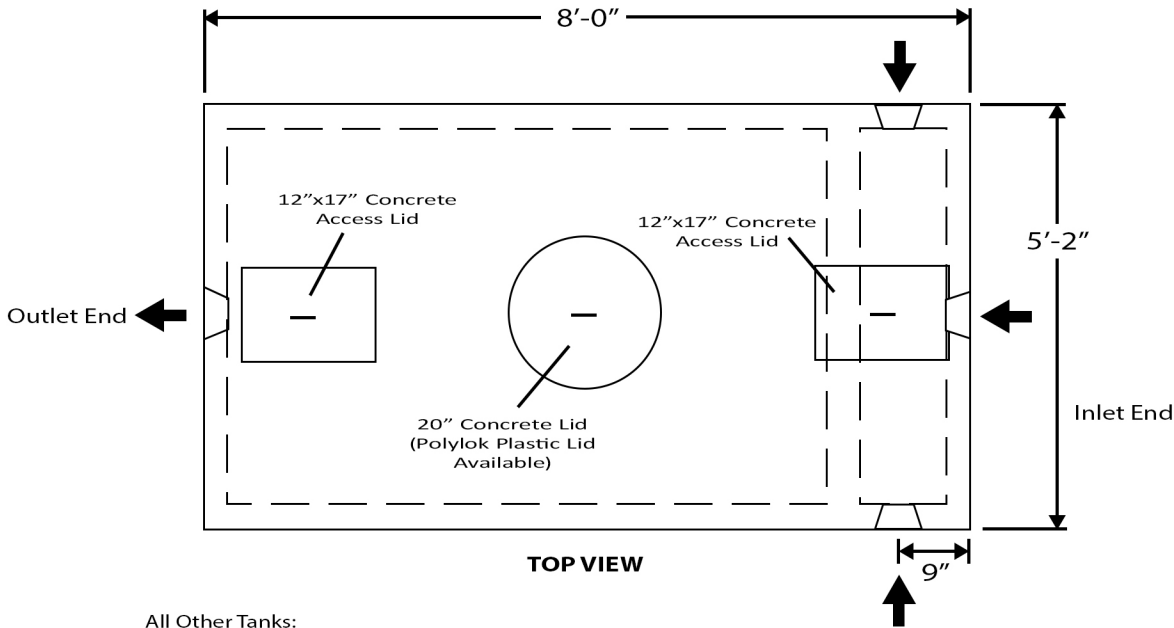

All Other Tanks:
 Concrete Baffle - 8"x13" Concrete Access Lid
 Plastic Baffle - 12"x17" Concrete Access Lid

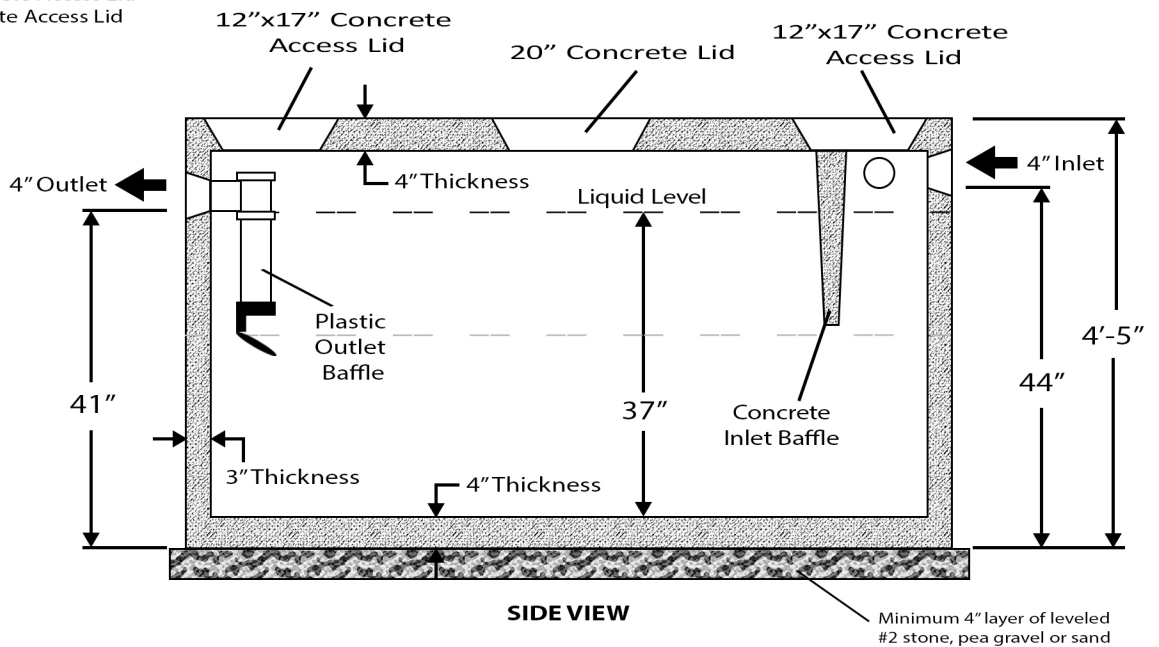

SPECIFICATIONS
<ul style="list-style-type: none"> - Concrete Min. Strength: 5,000 psi - Reinforcement: #3 Rebar, 6x6x10x10 Wire, Nycon XL100 Fiber - Air Entrainment: 6% - Construction Joint: Polylok Butyl Rubber Sealant - Pipe Connection: Polylok Seal - Weight = 6,650 lbs.

Peenpack Inc.

96 Lybolt Drive
 Huguenot, NY 12746
 (845)-856-6726 / Fax 856-6842
 peenpack@frontier.com
 www.peenpack.com

2019