


H2O SEPTIC TANK SPECIFICATIONS

Gallons	L	W	H	LL	B-BI	A
1,000	10'-0"	5'-0"	6'-2"	48"	57"	38"
1,250	10'-0"	6'-0"	6'-2"	48"	57"	
1,500	10'-0"	6'-0"	6'-8"	56"	65"	
2,000	12'-0"	6'-0"	7'-2"	60"	69"	48"

***Additional sizes available upon request**

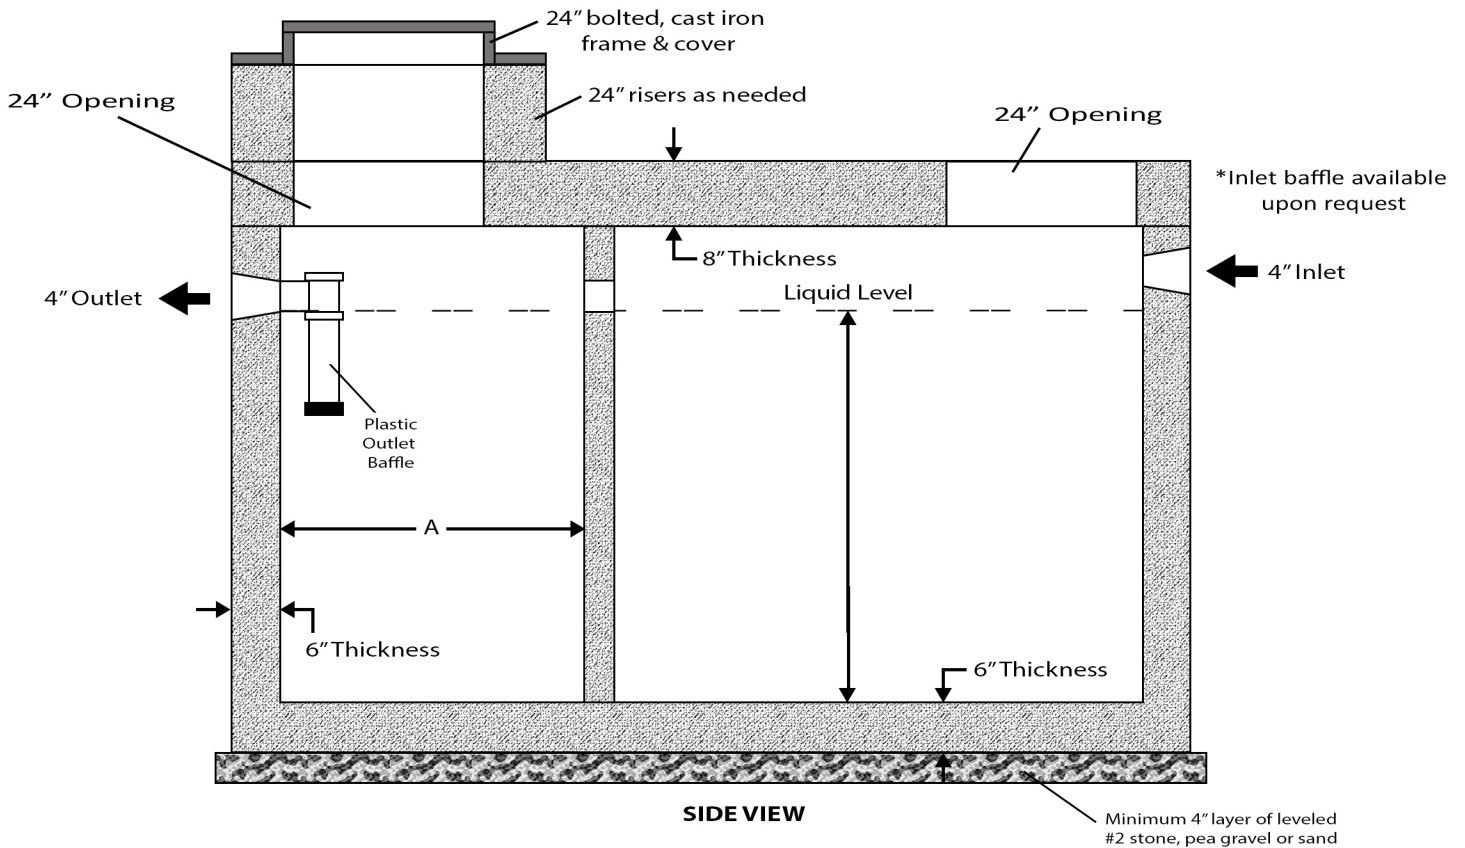

SPECIFICATIONS	
<ul style="list-style-type: none"> - Concrete Min. Strength: 5,000 psi - Reinforcement: #3 Rebar, 6x6x10x10 Wire, Nycon XL100 Fiber - Air Entrainment: 6% - Construction Joint: Polylok Butyl Rubber Sealant - Pipe Connection: Polylok Seal - Weight = Varies upon tank size 	<h2 style="margin: 0;">Peenpack Inc.</h2> <p style="margin: 0;">96 Lybolt Drive Huguenot, NY 12746 (845)-856-6726 / Fax 856-6842 peenpack@frontier.com www.peenpack.com</p> <p style="margin: 0; font-size: small;">2019</p>