
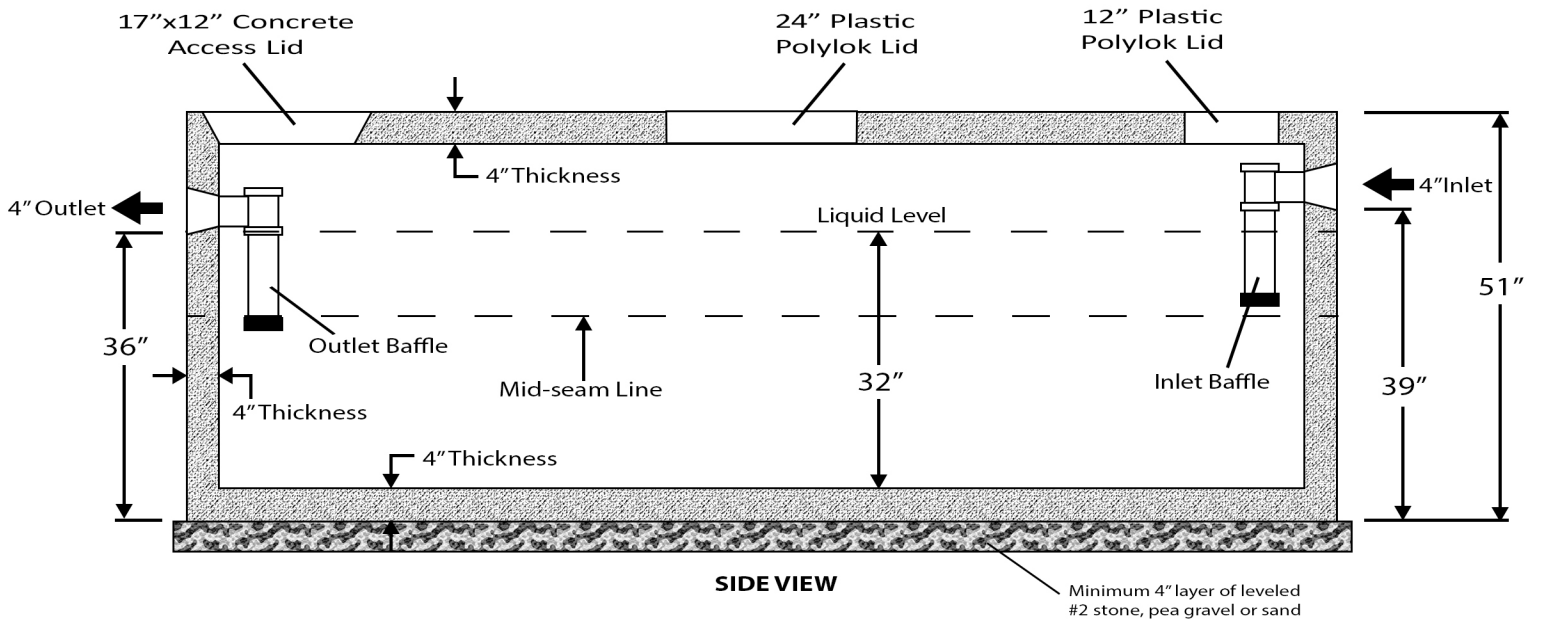


# 1250 GAL. MID-SEAM SINGLE CHAMBER SEPTIC TANK

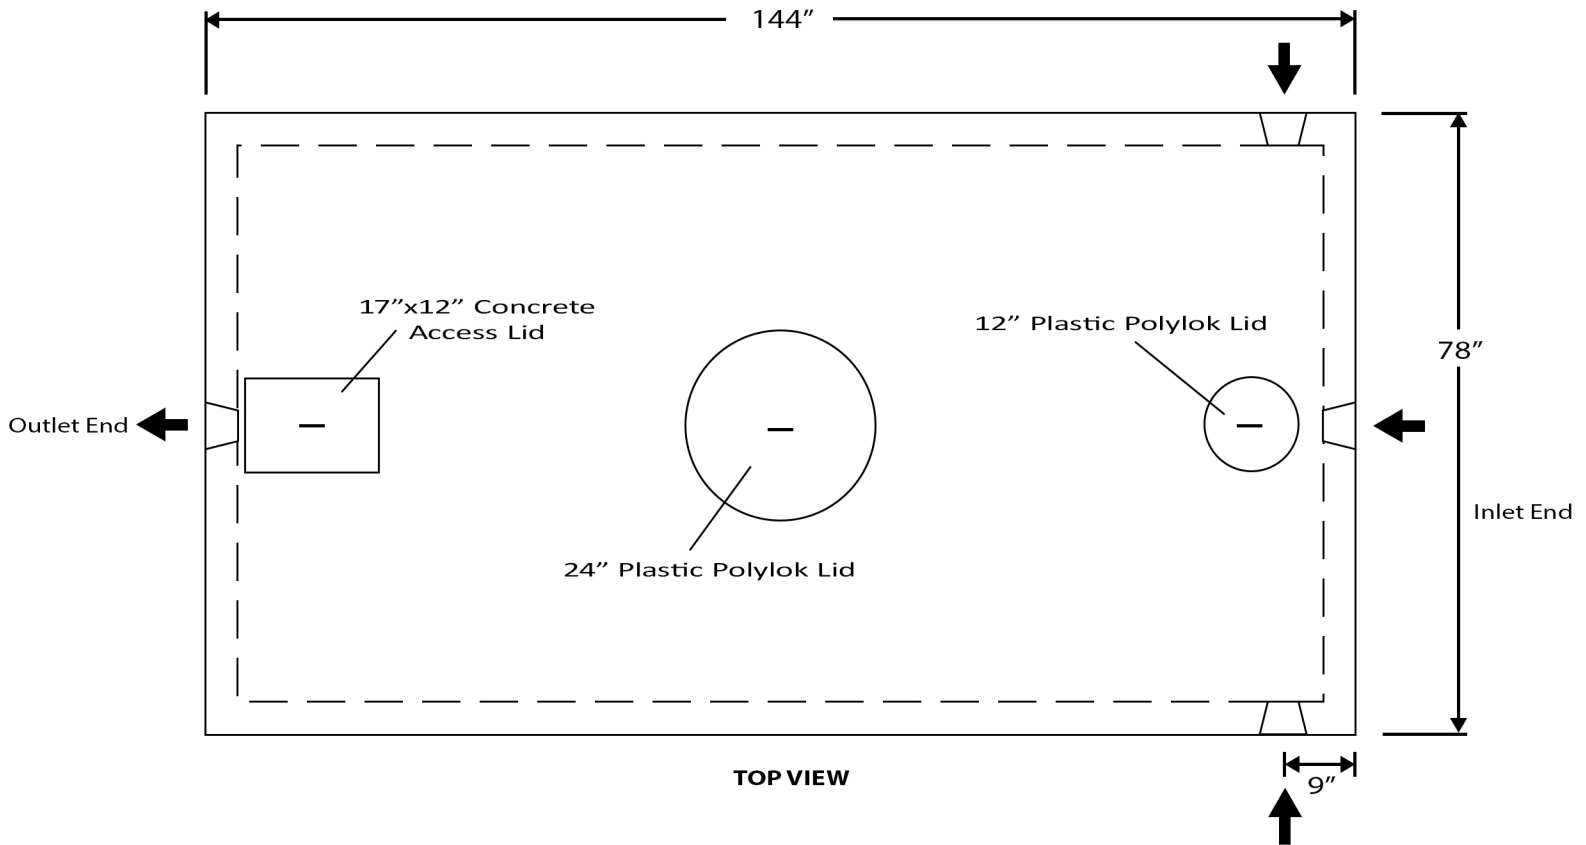

SPECIFICATIONS	
<ul style="list-style-type: none"> <li>- Concrete Min. Strength: 5,000 psi</li> <li>- Reinforcement: #3 Rebar, 10x10x10x10 Wire, Nycon XL100 Fiber</li> <li>- Air Entrainment: 6%</li> <li>- Construction Joint: Polylok Butyl Rubber Sealant</li> <li>- Pipe Connection: Polylok Seal</li> <li>- Weight = 15,600 lbs.</li> </ul>	<p><b>Peenpack Inc.</b></p> <p>96 Lybolt Drive                      Huguenot, NY 12746                      (845)-856-6726 / Fax 856-6842                      peenpack@frontier.com                      www.peenpack.com</p> <p>2019</p>